

## 4 VIE SL


4 VIE SL for the side movement of long material represents, within the loading movement, the most concrete answer to all requirements of power, ergonomics and safety.

4 VIE SL is characterised by an innovative construction concept which has allowed the integration inside the machine body of an advanced battery charger.


### CONTROL BOARD

Includes:


- steering rudder with feed control, hour-meter with exhausted battery warning light and horn.
- distributor placed on the machine body which allows a speed modulation assuring an extremely and precise fork lifting/ descent and the rotation of a leading front wheel.

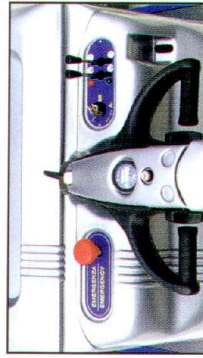


Battery charger controlled by a microprocessor which allows the battery recharging simply by connecting it directly to a 220V electric line.



The easiness of use and maintenance always distinguish the ARMANNI products, of which 4 VIE SL is the most modern and successful expression. The handy opening system of the bodywork, which allows to enter the machine body obstacle-free, makes the maintenance interventions easier.

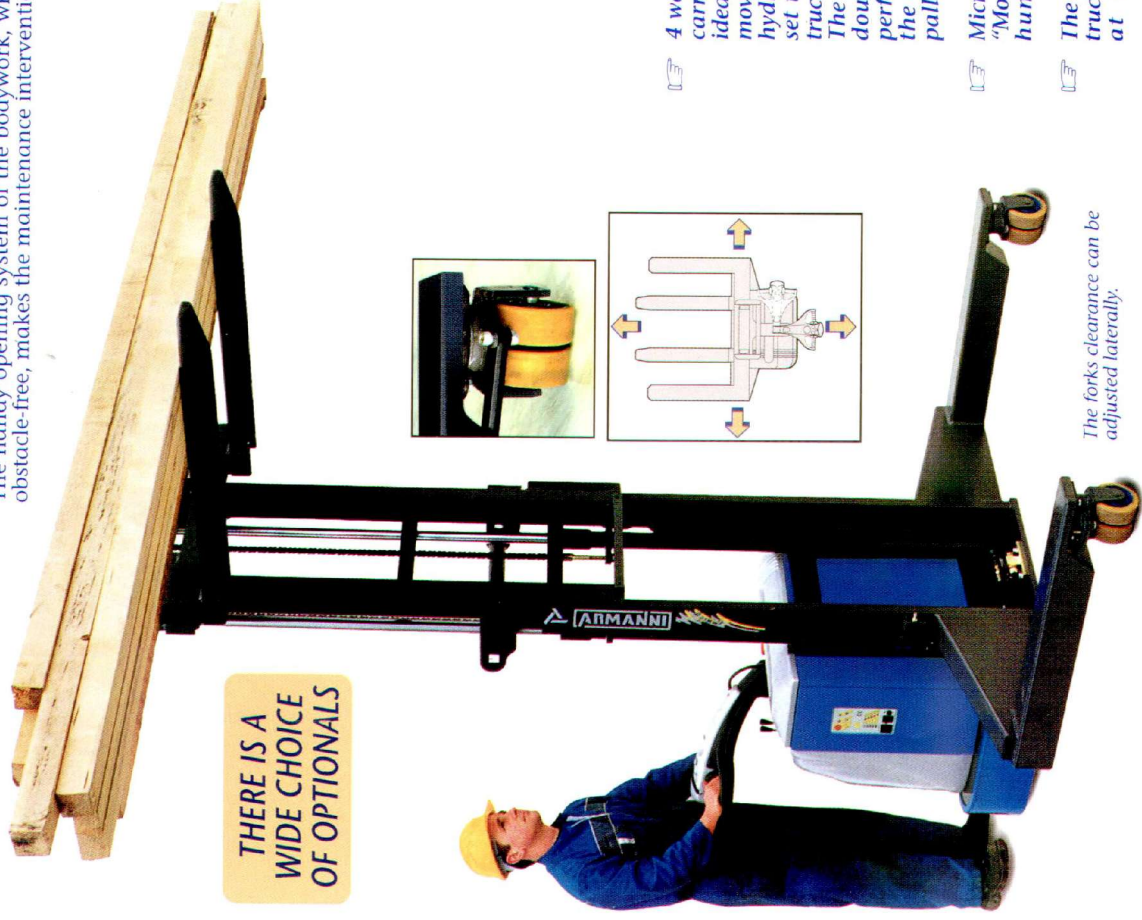

THERE IS A WIDE CHOICE OF OPTIONALS



The trucks are provided with a shock-absorber system so that the driving wheel adheres perfectly to the floor even in case of deep bumps.



4 way lift truck, suitable and specific to carry long pieces with narrow corridors, ideal for bars, pipes and shapes bundling movement and so on. Through a special hydraulic device the operator can easily set the wheels and consequently the lift trucks desired direction, frontal or lateral. The mast with special steel profiles and double side pistons assures excellent performances and a perfect visibility on the forks to allow an easy hold of the pallet.






Microprocessor controlled high-frequency "Mosfet" 24V electronics allows the trouble hunting through "Check-up led".



The computerised personalization of lift truck's performances can be carried out at the Armanni service centers.


The forks clearance can be adjusted laterally.

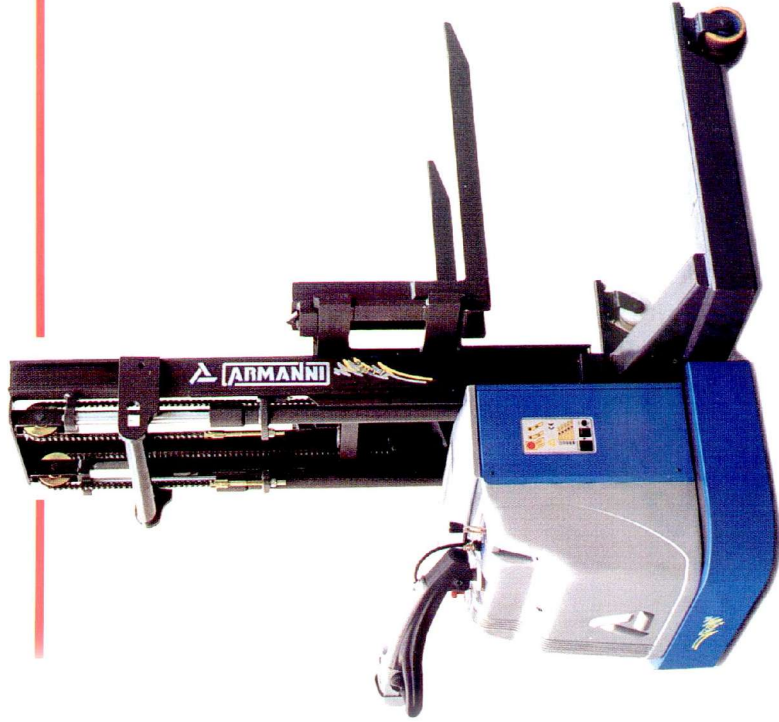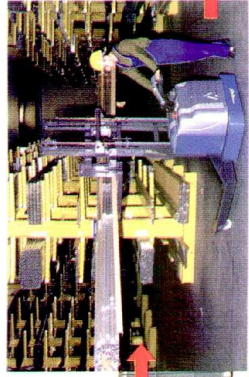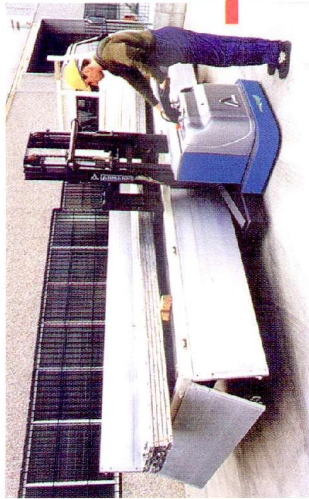


## 4 VIE SL 125

## 4 VIE SL 155

Maximum load chart according to the maximum lift.



This chart shows the barycenter position change of the loads when they change.



## 4 VIE SL MODELS

	125/16	155/16	125/25	155/25	125/30	155/30	125/35	155/35
Q	1200	1500	1200	1500	1200	1500	1200	1500
C	450	450	450	450	450	450	450	450
I	950	950	950	950	950	950	950	950
L	1780	1780	1810	1810	1810	1810	1810	1810
X	310	310	330	330	330	330	330	330
X2	175	175	175	175	175	175	175	175
Y	1285	1305	1305	1305	1305	1305	1305	1305
L2	840	840	860	860	860	860	860	860
M	350/1000	350/1000	350/1000	350/1000	350/1000	350/1000	350/1000	350/1000
N	160	160	160	160	160	160	160	160
h1	1990	1990	1740	1740	1990	1990	2250	2250
h2	1450	1450	200	200	1450	1450	3500	3500
h3	1600	1600	2500	2500	1600	1600	3470	3470
h4	2070	2070	1620	1620	2070	2070	1620	1620
B	1620	1620	1620	1620	1620	1620	1620	1620
WA	1510	1510	1510	1510	1510	1510	1510	1510

