


DELTA SLE

DELTA SLE represents, within the loading movement, the most concrete answer to all requirements of stoutness, ergonomics and safety.


DELTA SLE is characterised by an innovative construction concept which has allowed the integration inside the machine body of an advanced battery charger.

SPLIT CONTROL BOARD

Includes:
- a classical push-button system on the steering ruddler.
- a level system placed on the machine body which allows a speed modulation assuring an extremely soft and precise fork descent.




Battery charger controlled by a microprocessor which allows the battery recharging simply by connecting it directly to a 220V electric line.

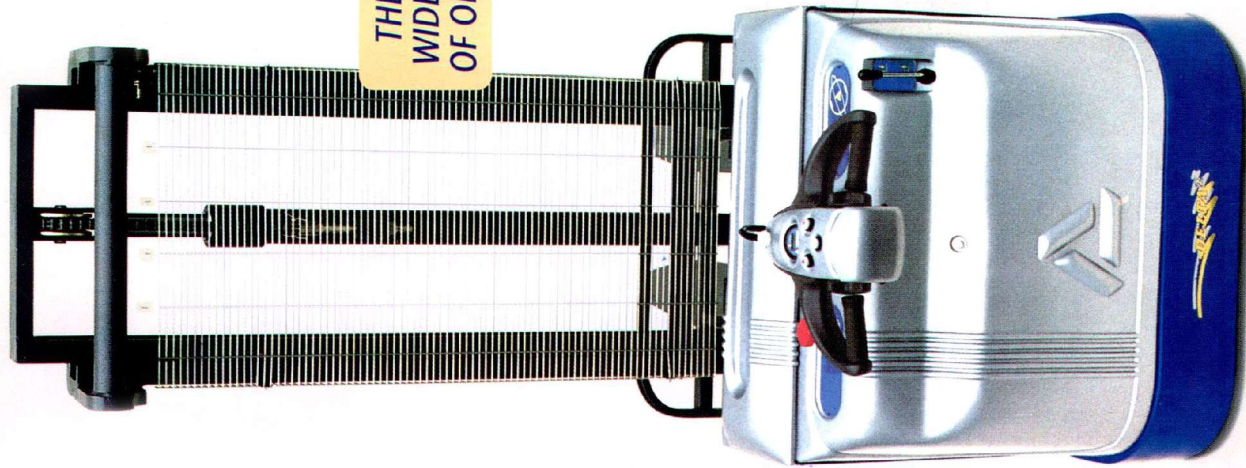


THERE IS A WIDE CHOICE OF OPTIONALS

The easiness of use and maintenance always distinguish the ARMANNI products, of which DELTA SLE is the most modern and successful expression. The handy opening system of the bodywork, which allows to enter the machine body obstacle-free, makes the maintenance interventions easier.




The trucks are provided with a shock-absorber system so that the driving wheel adheres perfectly to the floor even in case of deep bumps.


The mast with special steel profiles assures excellent performances by using the truck for the usual and continuous movement of heavy loads.




The forks clearance can be adjusted laterally.

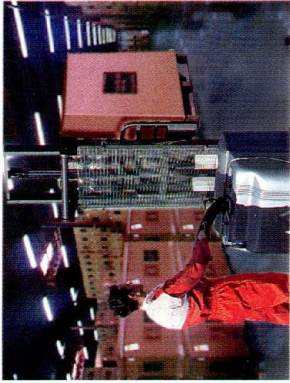

Microprocessor controlled high-frequency "Mosfet" 24V electronics allows the trouble hunting through "Check-up led".



The computerised personalization of lift truck's performances can be carried out at the Armanni service centers.

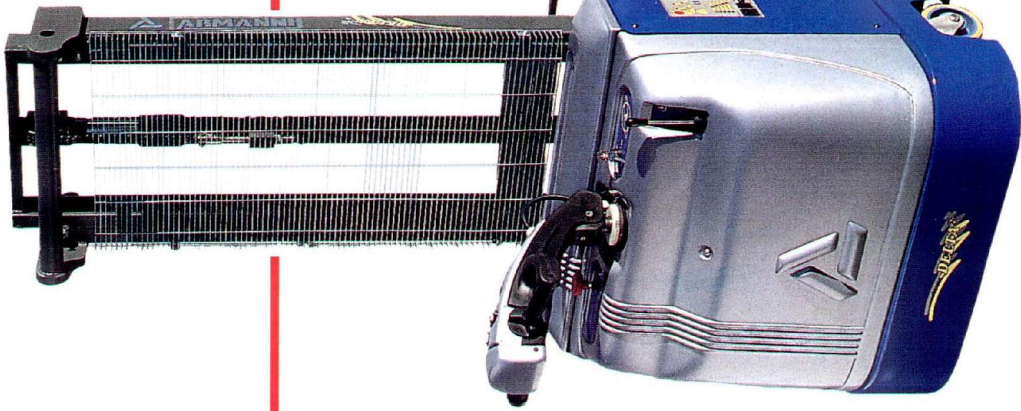

DELTA SLE 125 DELTA SLE 155

		DELTA SLE MODELS															
		125/16		155/16		125/25		155/25		125/30		155/30		125/35		155/35	
Q	kg	1200	1500	1200	1500	1200	1500	1200	1500	1200	1500	1200	1500	1200	1500	1200	1500
C	mm	600	1150	600	1150	600	1150	600	1150	600	1150	600	1150	600	1150	600	1150
L	mm	1870	1900	1870	1900	1870	1900	1870	1900	1870	1900	1870	1900	1870	1900	1870	1900
X	mm	375	410	375	410	375	410	375	410	375	410	375	410	375	410	375	410
X2	mm	175	175	175	175	175	175	175	175	175	175	175	175	175	175	175	175
Y	mm	1330	1350	1330	1350	1330	1350	1330	1350	1330	1350	1330	1350	1330	1350	1330	1350
L2	mm	730	730	765	785	765	785	765	785	765	785	765	785	765	785	765	785
M	mm	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530
N	mm	160	160	160	160	160	160	160	160	160	160	160	160	160	160	160	160
h1	mm	1990	1740	1990	1740	1990	1740	1990	1740	1990	1740	1990	1740	1990	1740	1990	1740
h2	mm	1450	200	1450	200	1450	200	1450	200	1450	200	1450	200	1450	200	1450	200
h3	mm	1600	2500	1600	2500	1600	2500	1600	2500	1600	2500	1600	2500	1600	2500	1600	2500
h4	mm	3420	3020	3420	3020	3420	3020	3420	3020	3420	3020	3420	3020	3420	3020	3420	3020
B	mm	840	840	840	840	840	840	840	840	840	840	840	840	840	840	840	840
WA	mm	1500	1520	1530	1550	1530	1550	1530	1550	1530	1550	1530	1550	1530	1550	1530	1550

