


DELTA SLTP

DELTA SLTP for slope overcoming represents, within the loading movement on the slopes, the most concrete answer to all requirements of power, ergonomics and safety.


DELTA SLTP is characterised by an innovative construction concept which has allowed the integration inside the machine body of an advanced battery charger.

CONTROL BOARD


Includes:
- steering rudder with feed control, hour-meter with exhausted battery warning light and horn.
- distributor placed on the machine body which allows a speed modulation assuring an extremely and precise fork lifting/ descent and the lifting of supporting legs.

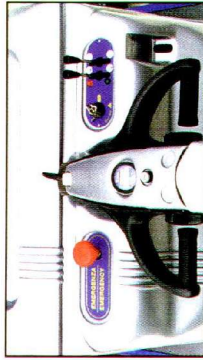


Battery charger controlled by a microprocessor which allows the battery recharging simply by connecting it directly to a 220V electric line.



THERE IS A WIDE CHOICE OF OPTIONALS

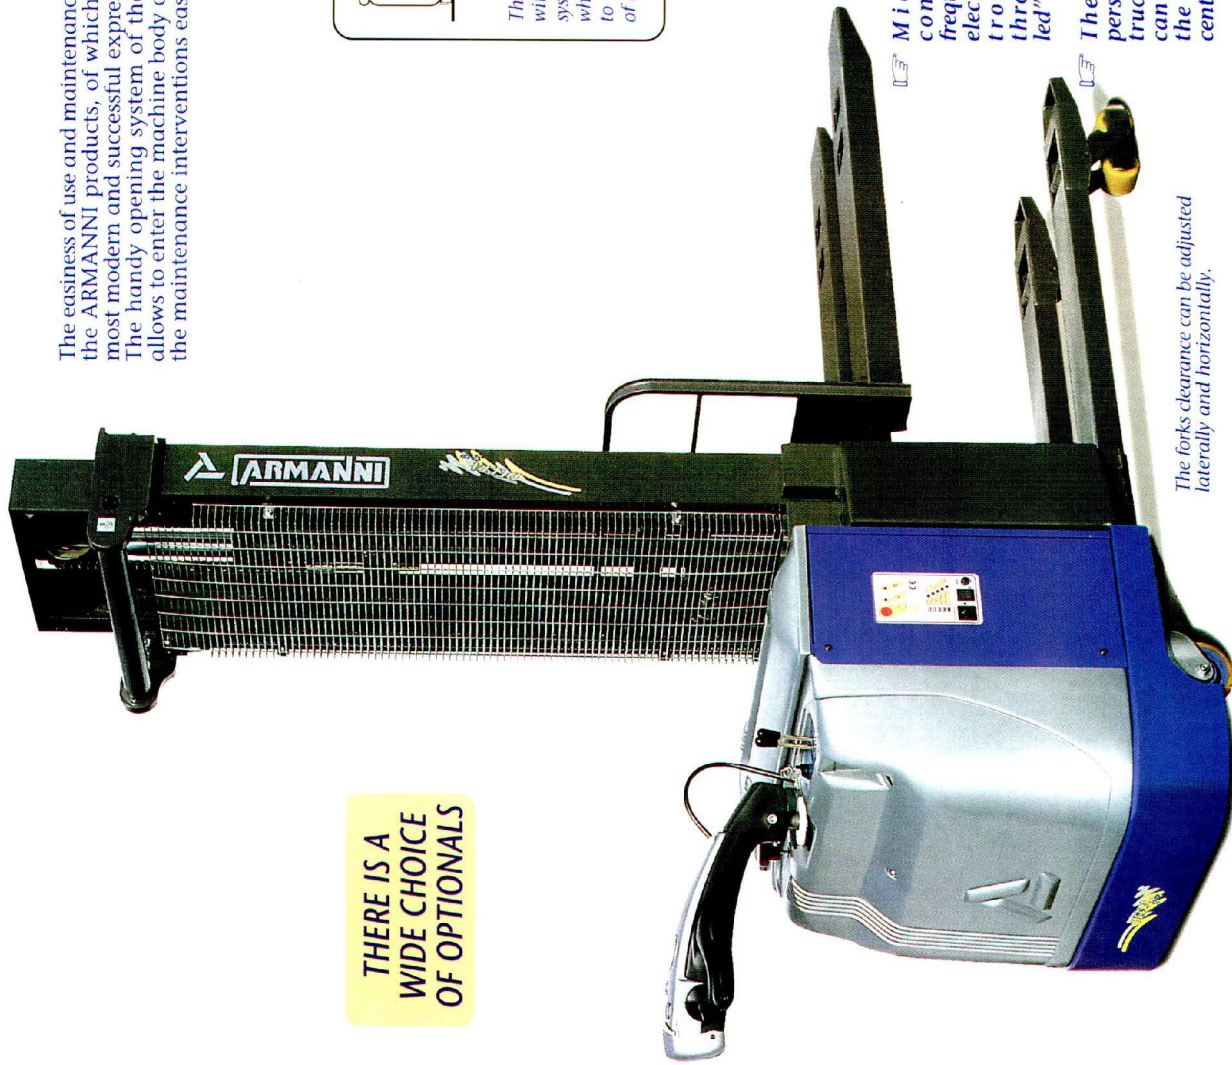

The easiness of use and maintenance always distinguish the ARMANNI products, of which DELTA SLTP is the most modern and successful expression. The handy opening system of the bodywork, which allows to enter the machine body obstacle-free, makes the maintenance interventions easier.



The trucks are provided with a shock-absorber system so that the driving wheel adheres perfectly to the floor even in case of deep bumps.

Microprocessor controlled high-frequency "Mosfet" 24V electronics allows the trouble hunting through "Check-up led".

The computerised personalization of lift truck's performances can be carried out at the Armanni service centers.

The forks clearance can be adjusted laterally and horizontally.




The hydraulic lift of the support legs allows an easy overcoming of the slopes and floor irregularities, the lift truck can be used to move two pallets together.




DELTA SLTP 125 DELTA SLTP 155

Maximum load chart according to the maximum lift.

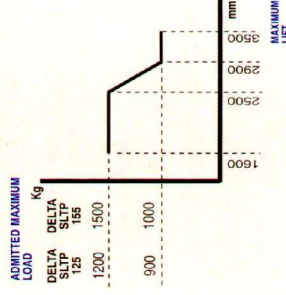

This chart shows the baricenter position change of the loads when they change.

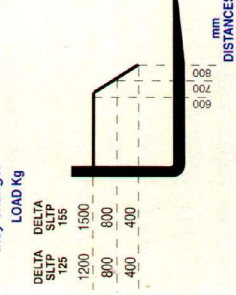

DELTA SLTP MODELS										
	125/16	155/16	125/25	155/25	125/30	155/30	125/35	155/35		
Q	1200	1500	1200	1500	1200	1500	1200	1500		
C	600	1150	600	1150	600	1150	600	1150		
L	2025	2045	2060	2080	2060	2080	2060	2080		
X	275	175	310	175	310	175	310	175		
X2	175	175	175	175	175	175	175	175		
Y	1575	1595	1575	1595	1575	1595	1575	1595		
L2	885	905	920	940	920	940	920	940		
M	560	560	560	560	560	560	560	560		
N	180	180	180	180	180	180	180	180		
h1	1990	1990	1740	1990	1990	1990	2250	2250		
h2	1450	200	200	200	200	200	200	200		
h3	1400	1400	2500	3000	3000	3000	3500	3500		
h4	2120	2120	3020	3520	3520	3520	4020	4020		
B	840	840	840	840	840	840	840	840		
WA	1770	1790	1770	1790	1770	1790	1770	1790		

